


Score-TRICENTRIC®


Metal Seated High Performance Butterfly Valves

Class 600 - Sizes 6"-24"

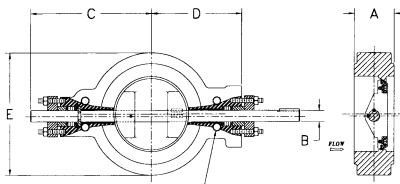


F - NUMBER OF BOLTS IN PATTERN
G - BOLT SIZE
H - BOLT CIRCLE

WAFER

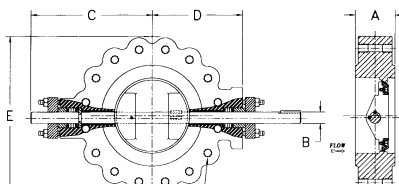

F - NUMBER OF BOLTS IN PATTERN
G - BOLT SIZE
H - BOLT CIRCLE

LUGGED

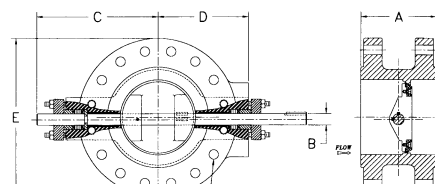

F - NUMBER OF BOLTS IN PATTERN
G - BOLT SIZE
H - BOLT CIRCLE

DOUBLE FLANGE

DIMENSIONS

Valve Size	Style	A in.	B in.	C in.	D in.	E in.	F no.	G size.	H in.	Approximate Weight lbs.	Cv
6	Wafer	3 ¹ / ₁₆				9 ³ / ₄				100	744
	Lugged	3 ¹ / ₁₆	1 ¹ / ₂	11 ³ / ₁₆	8 ⁵ / ₈	14	12	1"- 8	11 ¹ / ₂	124	
	Double Flange	8 ⁵ / ₁₆				14				150	
8	Wafer	4				12				154	1,450
	Lugged	4	1 ⁷ / ₈	12 ³ / ₈	9 ³ / ₄	16 ¹ / ₂	12	1 ¹ / ₈ " - 8	13 ³ / ₄	208	
	Double Flange	9 ¹ / ₁₆				16 ¹ / ₂				250	
10	Wafer	4 ⁵ / ₈				14 ¹ / ₈				226	2,125
	Lugged	4 ⁵ / ₈	2 ¹ / ₈	14 ¹ / ₈	11 ¹ / ₂	20	16	1 ¹ / ₄ " - 8	17	311	
	Double Flange	9 ⁷ / ₈				20				340	
12	Wafer	5 ¹ / ₂				16 ¹ / ₂				328	2,730
	Lugged	5 ¹ / ₂	2 ³ / ₄	15 ¹¹ / ₁₆	12 ¹³ / ₁₆	22	20	1 ¹ / ₄ " - 8	19 ¹ / ₄	443	
	Double Flange	10 ⁵ / ₈				22				550	
14	Wafer	6 ¹ / ₈				18 ⁷ / ₈				535	4,217
	Lugged	6 ¹ / ₈	3	16 ⁵ / ₈	13 ³ / ₄	23 ³ / ₄	20	1 ³ / ₈ " - 8	20 ³ / ₄	735	
	Double Flange	11 ⁷ / ₁₆				23 ³ / ₄				750	
16	Wafer	7				21				700	6,487
	Lugged	7	3 ¹ / ₈	17 ⁷ / ₈	14 ⁵ / ₈	27	20	1 ¹ / ₂ " - 8	23 ³ / ₄	885	
	Double Flange	12 ¹ / ₄				27				950	
18	Wafer	7 ⁷ / ₈				23 ¹ / ₈				950	8,874
	Lugged	7 ⁷ / ₈	3 ³ / ₄	20 ⁷ / ₁₆	17 ¹ / ₁₆	29 ¹ / ₄	20	1 ⁵ / ₈ " - 8	25 ³ / ₄	1268	
	Double Flange	13				29 ¹ / ₄				1300	
20	Wafer	8 ¹ / ₂				25 ¹ / ₂				1040	11,071
	Lugged	8 ¹ / ₂	3 ¹ / ₂	21 ⁷ / ₈	18 ³ / ₈	32	24	1 ⁵ / ₈ " - 8	28 ¹ / ₂	1560	
	Double Flange	13 ¹³ / ₁₆				32				1640	
24	Wafer	9 ¹ / ₈				30 ¹ / ₄				1820	16,188
	Lugged	9 ¹ / ₈	4	23 ⁵ / ₈	20 ¹ / ₈	37	24	1 ⁷ / ₈ " - 8	33	2340	
	Double Flange	15 ³ / ₈				37				2450	

Dimensions and weights subject to change without notice; consult SCORE Energy Products for confirmation.